


1 - 2 = normally closed  
(P pressure = 0)  
1 - 3 = normally open

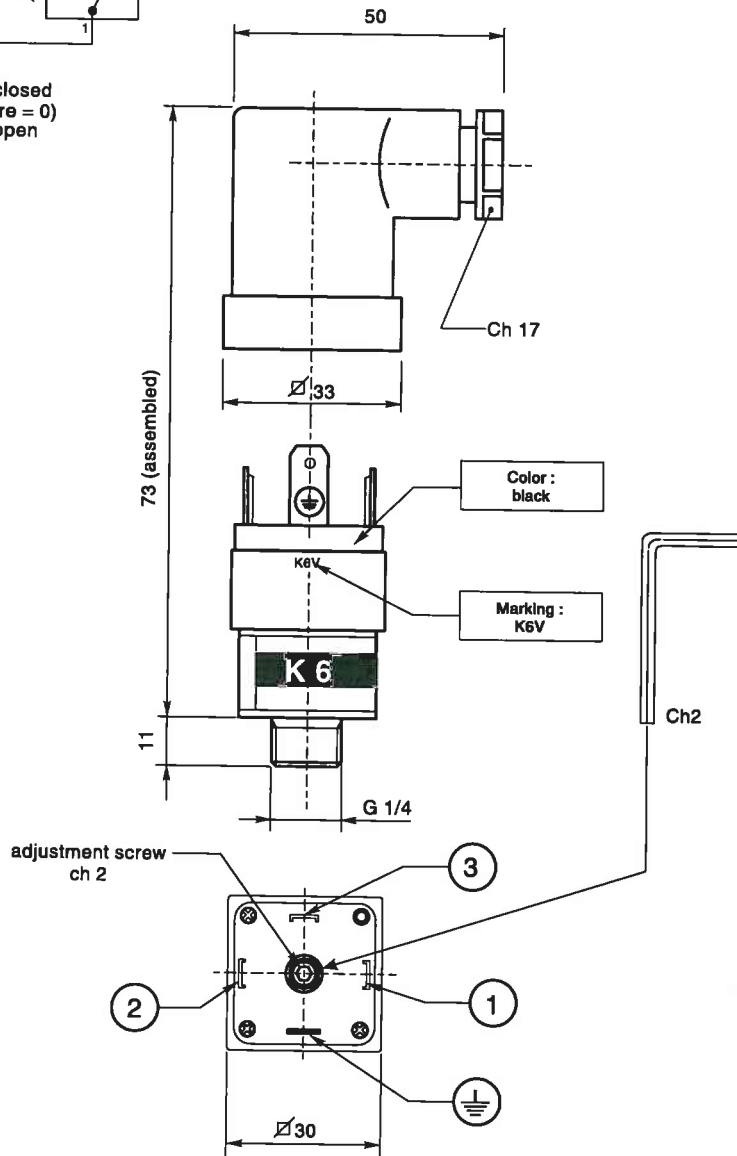

### TECHNICAL SPECIFICATION

|                             |   |
|-----------------------------|---|
| MAXIMUM CONTACT RATING      | 0,5 A / 250 V ca                        |
| INSULATION CLASS            | IP 65                                   |
| COMMUTATION FREQUENCY       | 90 cycles/min                           |
| WORKING TEMPERATURE         | -25 °C + +85 °C                         |
| ENDURANCE                   | 10 <sup>6</sup> cycles at 70 bar at 20° |
| WORKING PRESSURE RANGE      | 10 + 100 bar                            |
| MAXIMUM PRESSURE            | 300 bar                                 |
| SWITCHING ACCURACY          | ± 4% bar                                |
| RESET PRESSURE (HISTERESYS) | 10 + 15 % of set pressure               |